

OFFICE 200 OMNI

SKU: 50 Ohm: 472047 **MAP:** \$1,699.99
 75 Ohm: 471047

FEATURES

- Ideal amplifier system for small-to-medium businesses
- Covers up to 10,000 square feet
- Comes with LCD touch screen for increased usability
- Allows manual control of frequency bands
- FCC approved and works on all U.S. carrier networks, including Verizon, AT&T, T-Mobile, UScellular, and more



KIT INCLUDES

| | | | | | | | |
|-----------------------------|----------------------|--------------------------|---------------------------------|----------------------------------|-------------------------------------|--------------------------------------|--------------------------------------|
| 472047 50 Ohm Kit | Office 200 Amplifier | Omni Plus Antenna 314422 | Low Profile Dome Antenna 314407 | Lightning Surge Protector 859902 | 2ft Low-Loss Wilson400 Cable 952302 | 60ft Low-Loss Wilson400 Cable 952360 | 75ft Low-Loss Wilson400 Cable 952375 |
| 471047 75 Ohm Kit | Office 200 Amplifier | Omni Plus Antenna 314423 | Low Profile Dome Antenna 314407 | Lightning Surge Protector 859992 | 2ft Low-Loss RG11 Cable 951127 | 60ft Low-Loss RG11 Cable 951160 | 75ft Low-Loss RG11 Cable 951175 |

ABOUT


weBoost **Office 200 Omni** is perfect for small to medium-sized businesses and warehouses looking for a high-performance amplifier solution to improve cell signal in a commercial space. Office 200 Omni comes with a color LCD touch screen, allowing users to troubleshoot, assess performance, adjust the outside antenna, and turn bands on and off. All components needed for do-it-yourself installation are included. Office 200 Omni is 5G compatible and improves cell signal on all U.S. carrier networks, including Verizon, AT&T, T-Mobile, UScellular and more. Office 200 Omni comes with an industry-leading 3-year manufacturer's warranty and a 30-day money-back guarantee.

SPECIFICATIONS

| | |
|---------------------------|--|
| SKU NUMBER | 472047† / 471047† |
| FREQUENCIES | Band 12/17 700 MHz Band 13 700 MHz Band 5 850 MHz Band 4 1700/2100 MHz Band 25/2 1900 MHz |
| MAX GAIN | 72 dB |
| IMPEDANCE | 50 Ohm / 75 Ohm |
| POWER | 110-240V AC, 50-60 Hz, 20 W |
| CONNECTORS | N-Female / F-Female |
| BOOSTER DIMENSIONS | 14.25 × 10.75 × 2.25 in |
| BOOSTER WEIGHT | 7.7 lbs |

⚠️ WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer, and Bisphenol A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

HOW IT WORKS

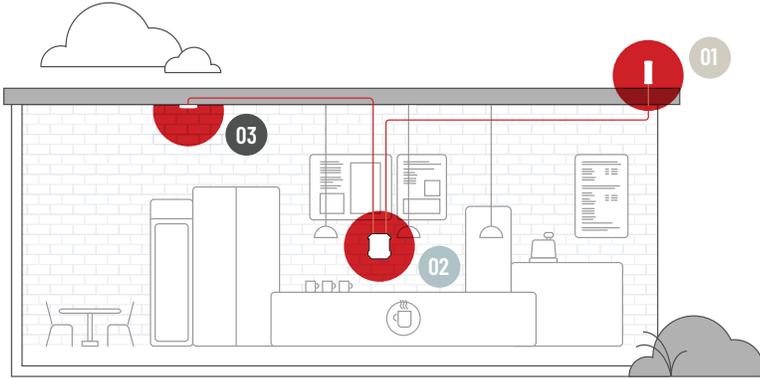

- 01 **Outside antenna:** The outside antenna communicates back and forth with nearby cell towers.
- 02 **Booster:** The booster amplifies any cell signals it receives from the outside antenna.
- 03 **Inside antenna:** The inside antenna broadcasts these signals for use throughout your business.

SPECIFICATIONS

| | | | | | |
|---|--------------------|-----------------|----------------|-----------------|--------------------|
| Power output for single cell phone (Uplink) dBm | 700 MHz Band 12/17 | 700 MHz Band 13 | 800 MHz Band 5 | 1700 MHz Band 4 | 1900 MHz Band 2/25 |
| | 24.0 | 24.0 | 25.0 | 25.0 | 25.0 |
| Power output for single cell phone (Downlink) dBm | 700 MHz Band 12/17 | 700 MHz Band 13 | 800 MHz Band 5 | 2100 MHz Band 4 | 1900 MHz Band 2/25 |
| | 15.1 | 15.1 | 15.3 | 15.2 | 15.2 |

SUPPORT



3-Year Warranty from Purchase.



UPC

